

# ASSEMBLY INSTRUCTION

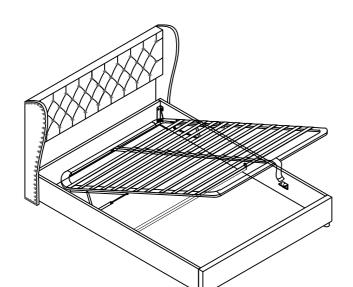

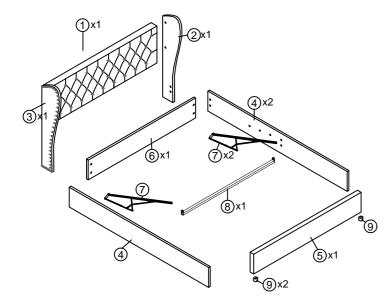


TIPS

1. This product is divided into 2 parcels for delivery. They may not arrive at the same time. Please wait patiently.

2. Please read the instructions fully before assembly. These instructions include important information which could ensure correct assembly. We have been working on providing high quality products for you. However, in the rare instance that your product is defective, missing parts or there are some issues, please don't hesitate to contact our customer service to submit parts requirements, assembly suggestion, or warranty claims, and we will give the best solution as soon as possible. If necessary, we need you to provide some more clear pictures of the issue.

3. Insert the screws in holes and tighten the screws, but not too tight, 70%~80% is ok, finally tighten all the screws. If some issues happened that some screws can not target to the hole or some parts are difficult to install, please adjust the tightness of the screws.

4. 2 people are recommended to finish




Parts List			Hardware List			
NO	ITEM	QTY	NO	ITEM		QTY
1	Head board	1	Α	Allen Key		1
			В	Bolts (M8x45mm)		20
2	Side head board	1	С	Washer	0	4
3	Side head board 1		D	Bolts (M8x25mm)	0 <b></b>	12
				Bolts (M8x40mm)		4
4	Side rails	2	G	Nails (M4x50mm)	<b></b>	2
5 Foot board	Foot board	4	Н	Hinge	â	4
		1	1	Nails (M4x25mm)	<b></b>	9
6	Storage box board	1	J	Plastic support	Ŷ	3
-		2	K	Bolts (M6x30mm)		10
7	Gas lift	Z		Nuts	9	2
8	Cross bar	1	М	Nuts	9	14
				Spanner	)	1
9	) Legs 2 0		0	Middle legs		2
10	Non woven fabric	1	Р	Middle slats	$\langle \varphi \rangle$	12
			Q	End slats cap	$\bigcirc$	24
11	Slat frame	1	R	Pull tab		1

Attention: Do not tighten the screws before completing the entire installation. If you have any difficulty with the installation process, please feel free to contact us.


#### Step 1x2

Fix the sideboard 2/3 To the headboard 1 With bolts F and Washers C by using Allen key A, then stick the black non woven fabric to the bottom of the headboard.

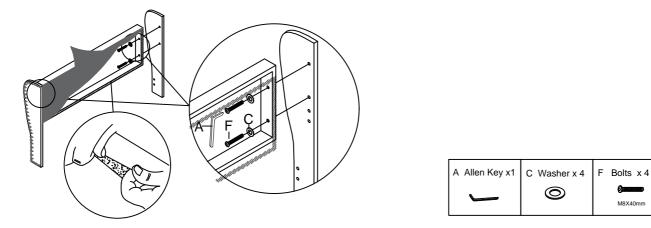


#### Step 2 x2

Fix the side rails To the side headboard and With bolts B, Bolts D and hinges H by using Allen key A

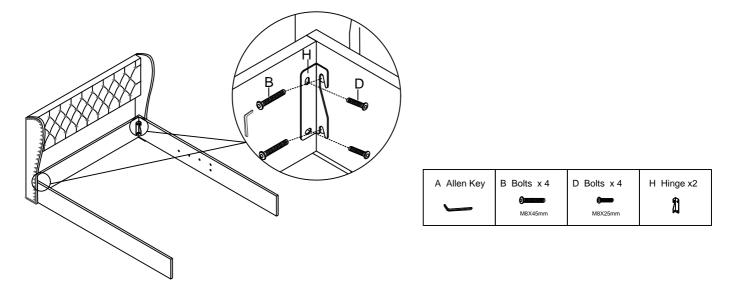

#### Step 3 x2


Fix the footboard (5)To the siderails (4)With bolts D and hinges H by using Allen key A

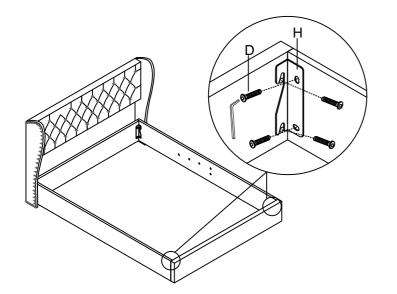

Allen Key	D Bolts x 8	H Hinge x2
	M8X25mm	â


# Step 4


Stick the black non-woven fabric 0 To the bottom of bed






Fix the legs (9) with nails G by using electric drill or screw driver

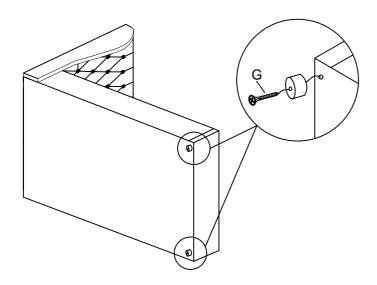





# Step 6

Fix the poly supports J to the side rails (4) and footboard (5) with nails I by using drill or screw driver

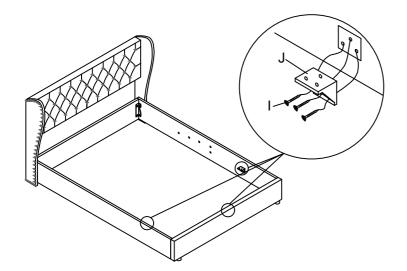




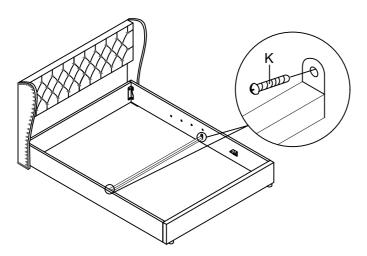



## Step 8x2


Fix the gas lifts (7) to the side rails (4) with blots K by using electric drill.fix the gas bar to the gas lifts (7) with nuts L

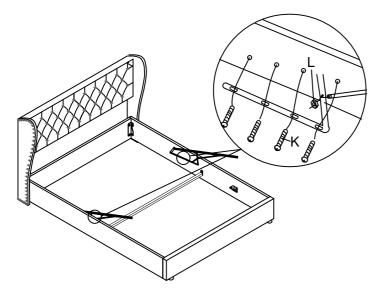

L Nuts x2	K Bolts x 8 ریورور	-7	
	M6X30mm	l	


## Step 9

Assemble the slats frame with bolts B and nuts M by using Spanner

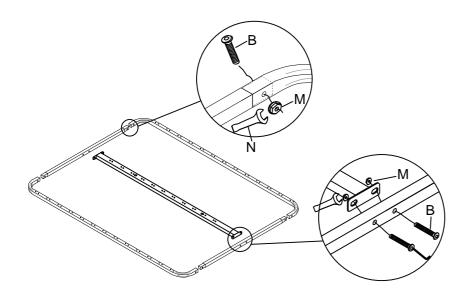

B Bolts x8 M8X45mm	M Nuts x8	N Spanner x1
-----------------------	-----------	--------------


#### Step 10 x2 Fix middle legs O to the middle bar with blots B by using Allen key A

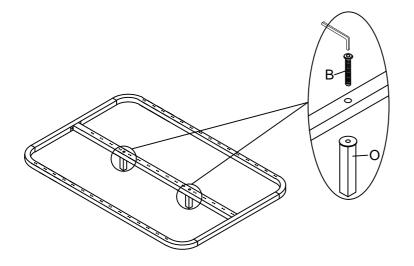

Allen Key	B Bolts x 2	O Middle legs x2
	M8X45mm	Ũ

## Step 11

Assemble the slats into the assembled slats frame with middle slats cap P and end slats cap Q put the pull tad R in the end of the slat frame

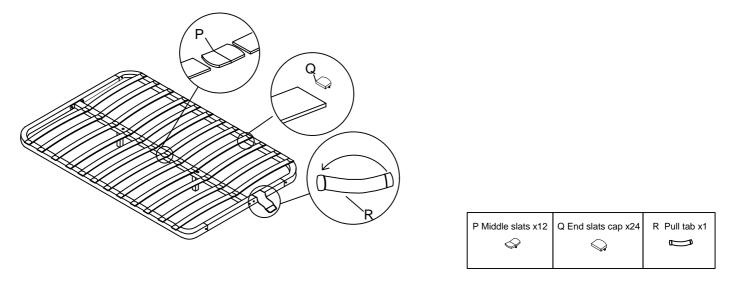

### Step 12

Assemble the slats frame 1 to the gas lifts 7 with bolts B and nuts M then assemble is finished, now please tighten all hardware and enjoy the bed

